

everGrreen

Wood Floor tiles





pearl



Rust



sand



smoke
Anti-Slip R11



honey

everGr^{een}



Evergreen/ Honey

Floor tile
Pavimento

everGr^{een}

Honey



EVG300 Ever Green Honey / 15,3x100 / 6"x39" ³/₈ Naturale 70
EVG310 Ever Green Honey **Grip** / 15,3x100 / 6"x39" ³/₈ Naturale / **Anti-Slip R11** 70

Smoke



EVG400 Ever Green Smoke / 15,3x100 / 6"x39" ³/₈ Naturale 70
EVG410 Ever Green Smoke **Grip** / 15,3x100 / 6"x39" ³/₈ Naturale / **Anti-Slip R11** 70

Sand



EVG200 Ever Green Sand / 15,3x100 / 6"x39" ³/₈ Naturale 70

Rust



EVG500 Ever Green Rust / 15,3x100 / 6"x39" ³/₈ Naturale 70

Pearl



EVG100 Ever Green Pearl / 15,3x100 / 6"x39" ³/₈ Naturale 70

Skirting


Battiscopa

8x45 / 3"1/8 x18"

8

pc.box 30 / kg.box 14,61

Vendita solo a scatole complete. To be sold as full box only.
Vendable uniquement en boîtes entières. Abnahme nur volle pakete.



EVG305 Batt. Honey



EVG405 Batt. Smoke



EVG205 Batt. Sand



EVG505 Batt. Rust




EVG105 Batt. Pearl

Special pieces


Pezzi speciali

15,3x100 / 6"x39" 3/8

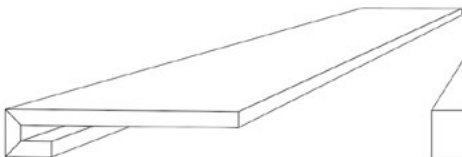


costa retta
lato lungo

116



costa retta
lato corto

101

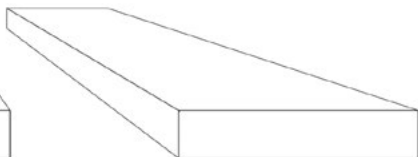

costa retta
angolo SX DX

121

Technical informations

Informazioni tecniche



Variations
Variabilità cromatica



Frost resistance
Resistenza gelo



Stain resistance
Resistenza macchie



Abrasion resistance
Resistenza abrasione

PEI 4

R 9

R 11

Matching Wall

more info

Evergreen RIV

Pavimento
Floor tiles -
Sols Bodenfliesen



Gres Porcellanato
Porcelain stoneware
Gres cerame - Feinsteinzeug

Spessore 10 mm.
Thickness - Epaisseur - Starke

R9 / R11

15,3x100 / 6"x39" 3/8

INSTALLATION ADVICE | CONSIGLI DI POSA | CONSEILS DE POSA | VERLEGEEMPFEHLUNGEN

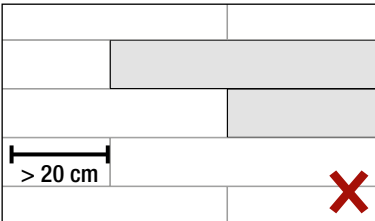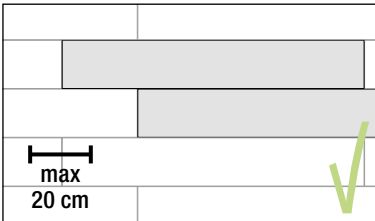

Si consiglia di sfalsare il lato più lungo per un massimo di 20 cm nella posa a correre. | The longest side should be staggered no more than 20 cm when laid in running bond. | Il est recommandé de décaler le côté long d'un maximum de 20 cm dans le cas del la pose parallèle. | Die laengere Seite darf maximal um 20 cm versetzt werden, sollte im wilden Verband verlegt werden.

AVERTENZA PER I SIGNORI POSATORI Controllare attentamente il materiale prima della posa particolarmente tono, calibro e scelta. Non si accettano reclami sul materiale posato. Si declina ogni responsabilità per la posa senza fuga; si considera posa a "giunto minimo" quella con fuga a 2 mm. | NOTICE TO TILE FIXERS The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm. | AVIS AUX CARRELEURS Contrôler attentivement les carreaux avant la pose particulièrement tonalité, calibre, choix. Aucune réclamation ne sera acceptée une fois que le matériel est posé. La responsabilité du fabricant ne pourra pas être mise en cause en cas de pose sans joints. On appelle "pose à joint minimum" une pose avec un joint de 2 mm. | HINWEIS FUER DIE VERLEGUNG Das Material ist vor der Verlegung genau zu überprüfen auf Tonalität, Kaliber, und Sorte. Reklamationen nach der Verlegung werden nicht akzeptiert. Wir übernehmen keine Haftung für eine fugenlose Verlegung; unter einer Verlegung mit sehr schmalen Fugen versteht man die Verlegung von 2 mm breiten Fugen.

TECH INFO Size / Formato	 Thickness	 Skid resistance
Cm	Spessore mm	Resistenza scivolamento
15,3x100	10	R 9 / R11

Technical characteristics / Caratteristiche tecniche
Caracteristiques technique / Technische eigenschaften.

Size Formato	Box			Pallet		
Cm	Pz	Mq	Kg/Sc	Box	Mq	Kg
15,3x100	8	1,23	24,8	42	51,66	1041

Packaging / Imballi / emballages / verpackung

EverGrreen

Wood

IN

15,3x100

Floor

Wall

25x60

OUT

15,3x100